
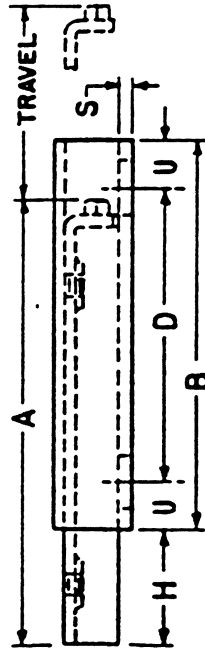
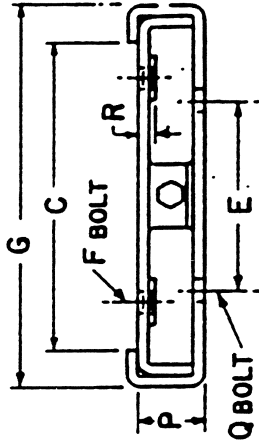


THE OVERLY-HAUTZ MOTOR BASE COMPANY

215 SOUTH WEST STREET
LEBANON, OHIO 45038
TELEPHONE: (513) 832-0025

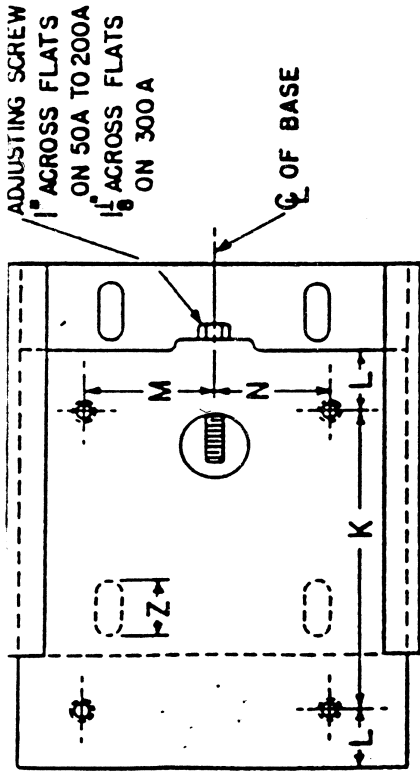

Slide Motor Base Dimensions

| Base No. Part No. | NEMA Motor Frame No. | | Travel | A | B | C | D | E | F * | G | H | K | L | M | N | P | Q | R | S | U | Z | |
|----------------------|----------------------|-----------------|--------|--------|--------|----------|--------|--------|-----|--------|--------|--------|-------|-------|-------|-------|-----|--------|------|---------|--------|-------|
| | 1750 RPM | 1160 RPM | | | | | | | | | | | | | | | | | | | | |
| 50A | 213 | 213, 213T | 4 3/4 | 11 1/4 | 10 3/4 | 9 3/8 | 7 7/16 | 7 | 3/8 | 10 1/4 | 2 1/16 | 8 1/2 | 1 1/8 | 2 | 3 1/2 | 1 3/4 | 3/8 | 3/8 | 1/8 | 1 21/32 | 1 1/16 | |
| | 215 | 215 | | | | | | | | | | | | | | | | | | | | |
| | 182T* | 182T* | | | | | | | | | | | | | | | | | | | | |
| | 184T* | 184T* | | | | | | | | | | | | | | | | | | | | |
| 100A | 254, 254U | 254, 254U, 254T | 4 3/4 | 13 1/2 | 13 | 12 13/16 | 8 1/4 | 10 | 1/2 | 14 1/4 | 2 3/8 | 10 | 1 1/2 | 5 | 5 | 2 | 5/8 | 3/8 | 7/16 | 2 3/8 | 2 1/2 | |
| | 256U | 256U | | | | | | | | | | | | | | | | | | | | |
| | 213T* | 213T* | | | | | | | | | | | | | | | | | | | | |
| | 215T* | 215T* | | | | | | | | | | | | | | | | | | | | |
| 200A | 284, 284U, 284T | 284, 284U, 284T | 6 7/8 | 16 3/4 | 16 1/4 | 15 13/16 | 11 1/2 | 12 | 5/8 | 17 1/4 | 3 3/8 | 12 1/2 | 2 5/8 | 4 1/2 | 6 | 2 1/4 | 5/8 | 1 3/16 | 3/16 | 2 3/8 | 2 1/2 | |
| | 286U, 286T | 286U, 286T | | | | | | | | | | | | | | | | | | | | |
| | 324, 324U | 324, 324U | | | | | | | | | | | | | | | | | | | | |
| | 326, 326U | 326, 326U | | | | | | | | | | | | | | | | | | | | |
| | 254T* | 254T* | | | | | | | | | | | | | | | | | | | | |
| | 256T* | 256T* | | | | | | | | | | | | | | | | | | | | |
| 300A | 364, 364U | 364, 364U | 6 1/4 | 18 7/8 | 18 1/4 | 16 5/16 | 11 7/8 | 12 1/4 | 5/8 | 18 1/8 | 3 1/4 | 14 | 2 1/8 | 5 1/8 | 6 1/8 | 2 1/2 | 5/8 | 1/4 | 1/4 | 1/4 | 3 3/16 | 3 5/8 |
| | 365 | 365 | | | | | | | | | | | | | | | | | | | | |
| | 324T* | 324T* | | | | | | | | | | | | | | | | | | | | |

* Bases are tapped with national coarse threads for those motor frames not marked with an asterisk. Bases for motor frames marked with an asterisk will be drilled and tapped on order at an extra charge and will require "F" diameter bolts and nuts—when ordering specify NEMA motor frame size.