
HEAVY DUTY RAILS

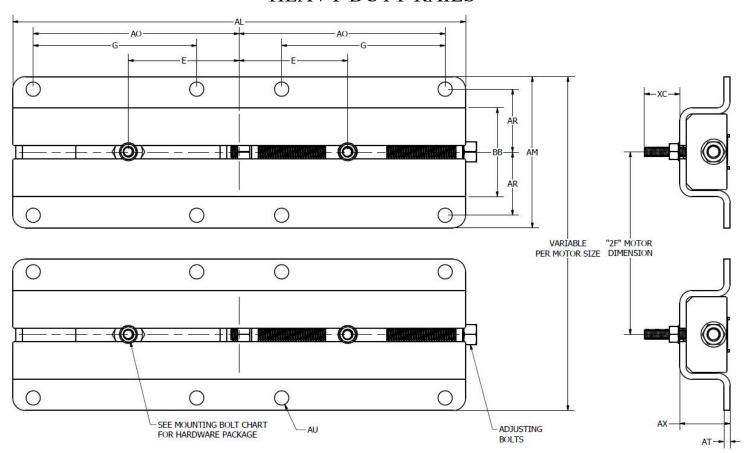

DIMENSION CHART FOR HEAVY DUTY RAILS														
PART NUMBER	FRAME SERIES	AL	AM	AX	ВВ	E	AO	G	AR	AU	AT	XC	MOUNTING BOLTS	ADJUSTING BOLTS
A100668	440	36.00	12.00	4.00	7.06	7.00(MIN) 29.00(MAX)	1 6.38	13.00	5.00	1.13	0.50	2.81	3/4"-10	1"-5 ACME
A100225	500, 5000, 580, 5800	40.50	12.50	4.00	7.56	7.00(MIN) 34.00(MAX)	18.63	12.00	5.25	1.13	0.50	3.94	SELECTION REQUIRED	1"-5 ACME
A100226	580, 5800, 680, 6800	49.50	12.50	4.00	7.56	14.00(MIN) 43.00(MAX)	23.13	17.88	5.25	1.13	0.50	3.95	SELECTION REQUIRED	1"-5 ACME

TO DETERMINE SELECTION OF MOUNTING BOLT HARDWARE

- 1. VERIFY MOUNTING HOLE SIZE OF DEVICE BEING MOUNTED
- 2. SELECT HARDWARE PACKAGE WITH APPROPRIATE THREAD SIZE

EXAMPLE:

THE MOTOR HAS A MOUNTING HOLE DIMENSION OF 1.0625"
THE APPROPRIATE THREAD SIZE IS EITHER 7/8"-9 OR 1"-8
THEREFORE HARDWARE PACKAGE B OR C IS REQUESTED ON ORDER

MOUNTING BOLT SELECTION CHART										
HARDWARE PACKAGE	THREAD SIZE		HARDWARE PACKAGE	THREAD SIZE						
А	3/4"-10		D	1-1/8"-7						
В	7/8''-9		E	1-1/4"-7						
С	1"8		F	1-3/8"-7						
			G	1-1/2"-7						